

FIRE RATING: 45 MINUTES

FIRE-RATED SELF-CLOSING PROJECTED WINDOW



PRODUCT DESCRIPTION

Optimum's 45 Minute Fire-Rated Cold-Rolled Steel Projected windows are used in non-temperature rise applications and through various glazing options, can be modified to address most fire-rated applications. Its narrow profiles provide open vision areas that allow natural daylight without compromising life-safety and design flexibility. The entire Fire-Rated line has been through rigorous testing. Initially, a "heat test" is performed where the window is exposed to temperatures up to 1600 degrees Fahrenheit. They will then endure the "Hose Stream Test", wherein which the glass holds fast even during this extreme change in temperature. Where other units of different material will react poorly when placed under these extreme conditions, Optimum's Fire-Rated Steel windows will hold and maintain its integrity.



UL CLASSIFIED & LABELED



HOSE STREAM TESTED



NON-TEMPERATURE RISE



POSITIVE PRESSURE

AUTHORIZED DIMENSIONS

	45 MIN	60 MIN	90 MIN
Min. Operable Dimension	20" x 21"	n/a	n/a
Max. Operable Dimension	54" x 48"	n/a	n/a
Max. Frame Dimension	60" x 120"	n/a	n/a
Wire Glass Max. Exposed Area	1,296 in ²	n/a	n/a
Ceramic Glass Max. Exposed Area	3,325 in ²	n/a	n/a

FEATURES

- Cold-Rolled sections formed from GALVANIZED STEEL
- EPDM and Silicone Pile Weather-Stripping
- Mitered frame; Corner keyed frame & sash joinery
- Can accommodate glazing ranging from 3/16" to 1" in O.A. thickness
- Factory glazed with mechanically fastened steel glazing beads
- Zinc Enrich Epoxy Primer and Powder Coated finish
- One Cam Lock at center of sash up to 34" (two cam locks thereafter)
- Available in Project-In or Project-Out
- Double Projected configuration available
- Self-Closing mechanism w/ Fusible links

NOTE: This product is intended for use in locations requiring fire-protective rated openings.

FIRE RATING: 45 MINUTES

FIRE-RATED SELF-CLOSING PROJECTED WINDOW

LISTINGS/STANDARDS


Classified and labeled by Underwriters Laboratories Inc.® and Underwriters Laboratories of Canada®. File numbers R12349. Tests performed in accordance with:

UL 9	NFPA 80	ASTM E283	NFRC 100
UL10C	NFPA 257	ASTM E331	NFRC 200
		ASTM E330	NFRC 400
			NFRC 500

AVAILABLE OPTIONS:

- Non-Metallic Custom Color match
- Wire or Ceramic Glass
- Insulated Glass Units available
- Low-E Coated IGU
- Safety Impact Glass available
- Surface Applied Grids (spacers between glass n/a)
- Insect Screens
- Limit Stops
- Installation Straps
- Break Metal for trim
- Two-Tone finish

DETAILS: For complete set, visit: www.OptimumWindow.com

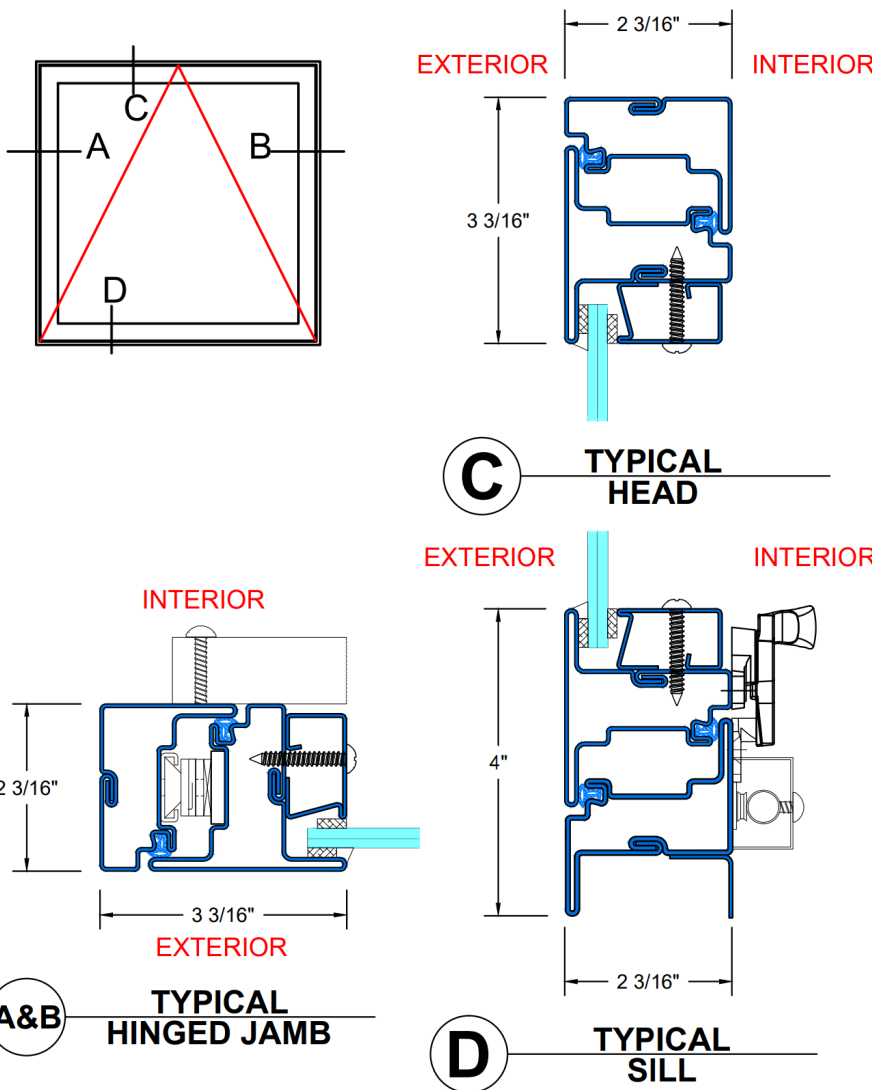

NOTE: This product is intended for use in locations requiring fire-protective rated openings.