


FIRE RATING: 45 MINUTES

FIRE-RATED SELF-CLOSING PROJECTED WINDOW




UL CLASSIFIED & LABELED


PROJECTED-IN TYPICAL DETAILS




8621-PI




8612-PI




8622-PI

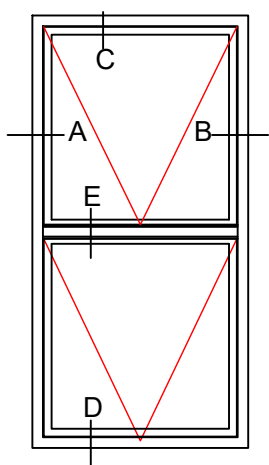

8612-PI/PI

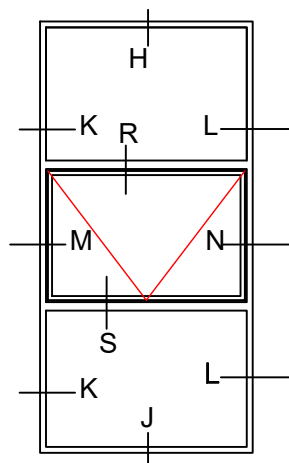


8613-FX/PI/FX

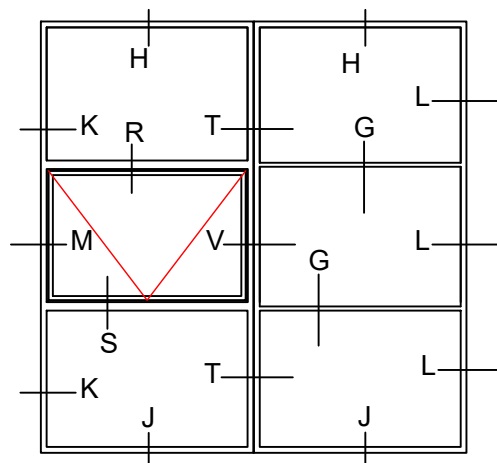

8612-PI-FX

8613-FX

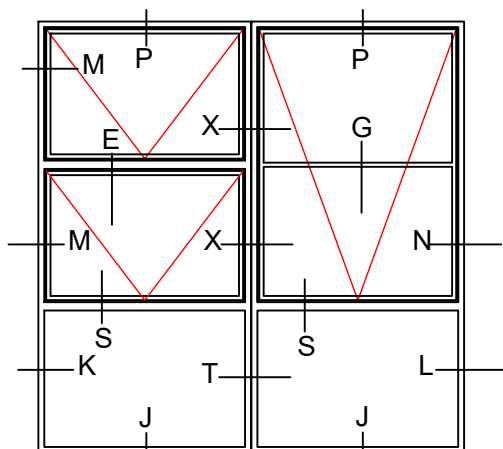

8612-PI-FX

8612-PI-FX

*WINDOWS WITH A WIDTH OVER 34"
WILL RECEIVE 2 HANDLES
AND 2 KEEPERS

*WINDOWS WITH A WIDTH UNDER 34"
WILL RECEIVE 1 HANDLES
AND 1 KEEPER

*ALL UNITS RESTRICTED TO OPEN 4"


FIRE RATING: 45 MINUTES

FIRE-RATED SELF-CLOSING PROJECTED WINDOW



UL CLASSIFIED & LABELED

PROJECTED-IN TYPICAL DETAILS

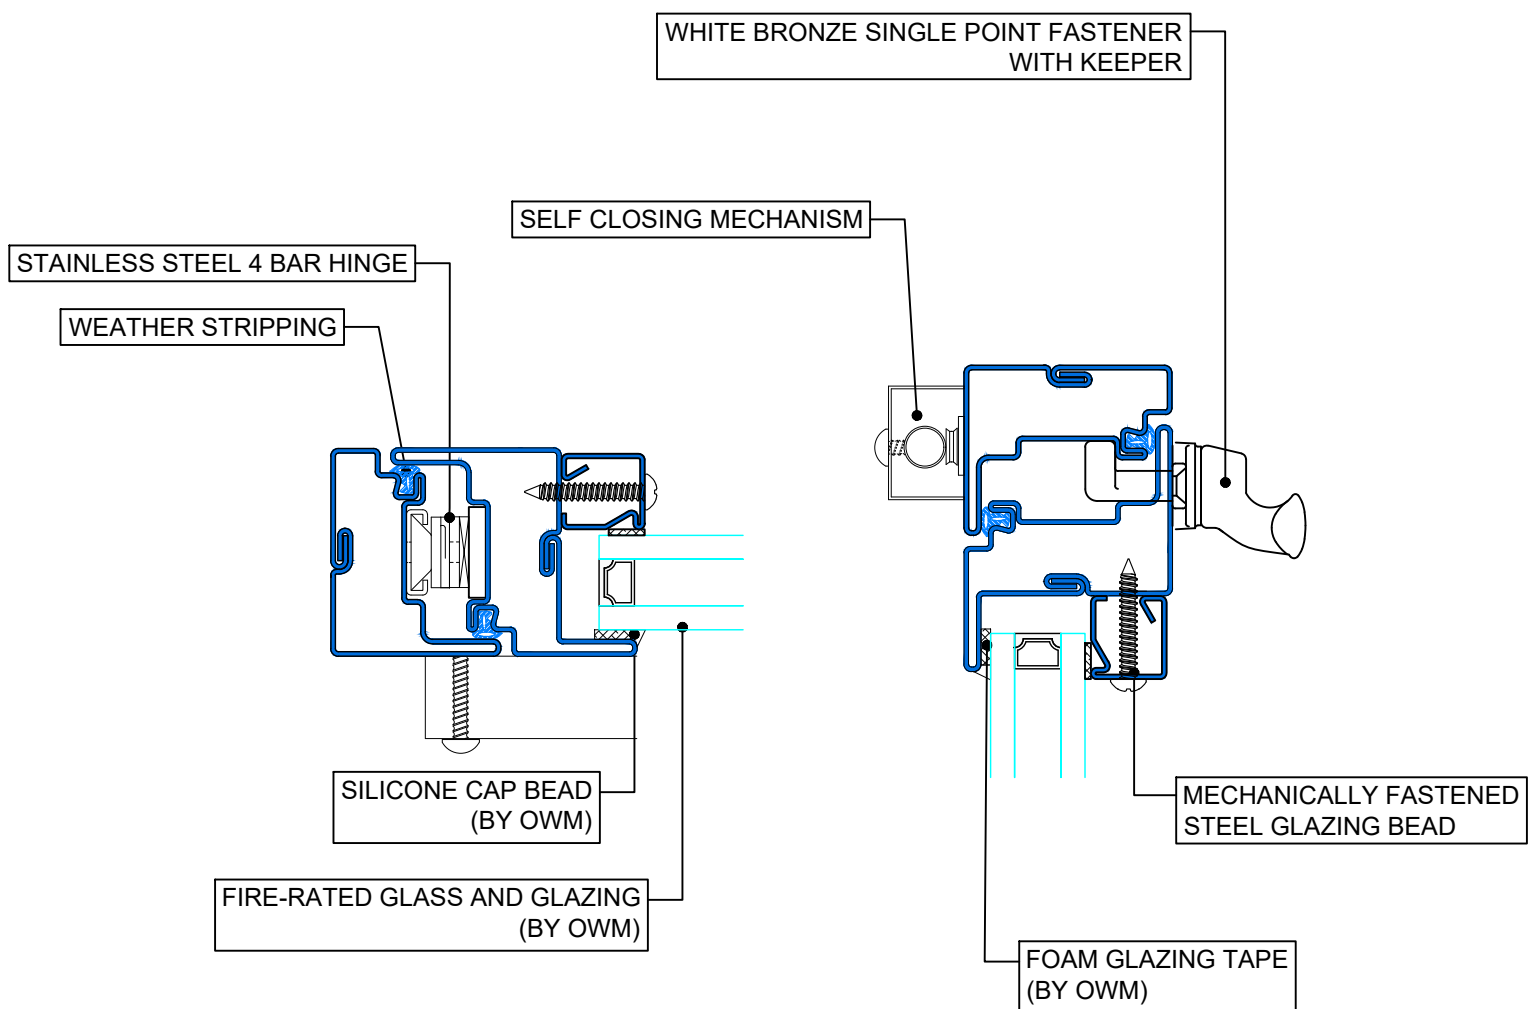

FIRE RATING: 45 MINUTES


FIRE-RATED SELF-CLOSING PROJECTED WINDOW



UL CLASSIFIED & LABELED

PROJECTED-IN TYPICAL DETAILS


INTERIOR

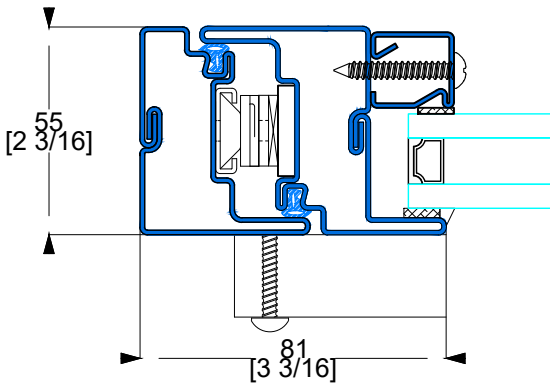

EXTERIOR

A&B **TYPICAL
HINGED JAMB**


EXTERIOR

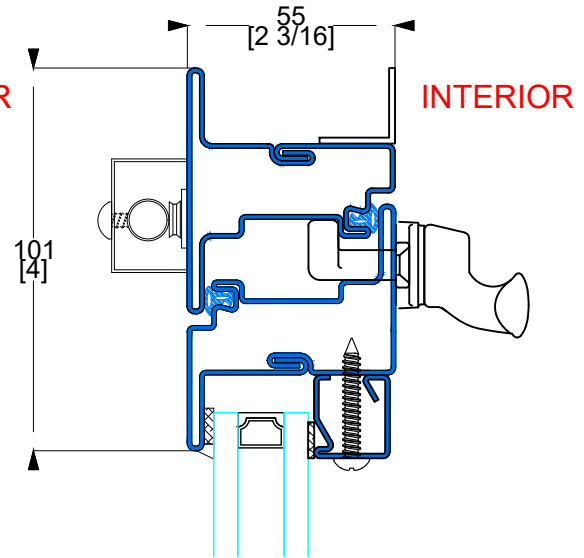

C **TYPICAL
HEAD**

EXTERIOR


INTERIOR

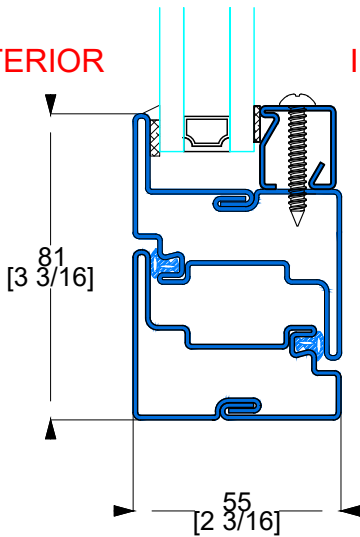

D **TYPICAL
SILL**

EXTERIOR

INTERIOR

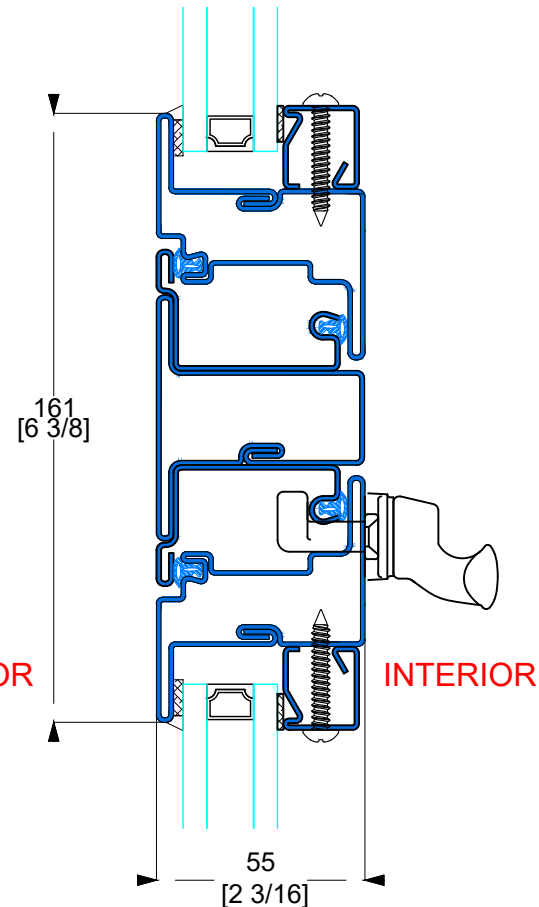

E **TYPICAL
STACKING JOINT**


FIRE RATING: 45 MINUTES

FIRE-RATED SELF-CLOSING PROJECTED WINDOW



UL CLASSIFIED & LABELED


PROJECTED-IN TYPICAL DETAILS

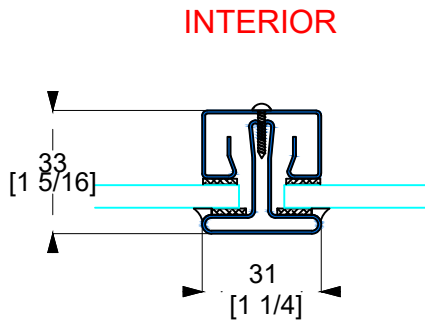

EXTERIOR


F TYPICAL VERTICAL
MUNTIN W/ 1/4" GLASS

EXTERIOR

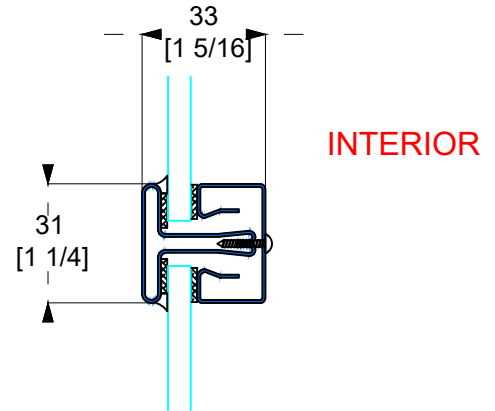

INTERIOR


G TYPICAL HORIZONTAL
MUNTIN W/ 1/4" GLASS

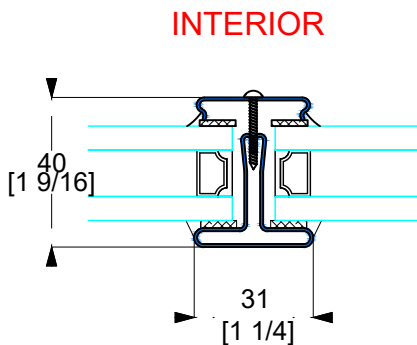

EXTERIOR

H&J TYPICAL VERTICAL
MUNTIN W/ 1" GLASS

EXTERIOR

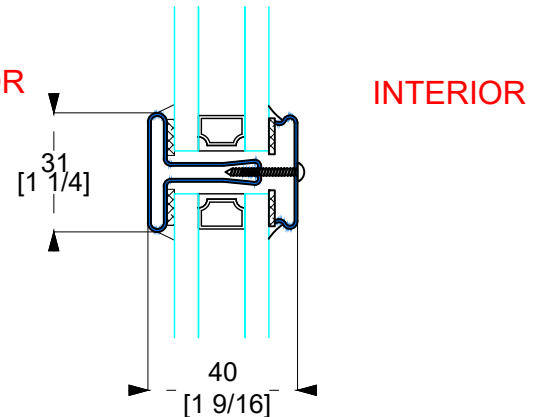

INTERIOR

K&L TYPICAL HORIZONTAL
MUNTIN W/ 1" GLASS


FIRE RATING: 45 MINUTES

FIRE-RATED SELF-CLOSING PROJECTED WINDOW




UL CLASSIFIED & LABELED


PROJECTED-IN TYPICAL DETAILS

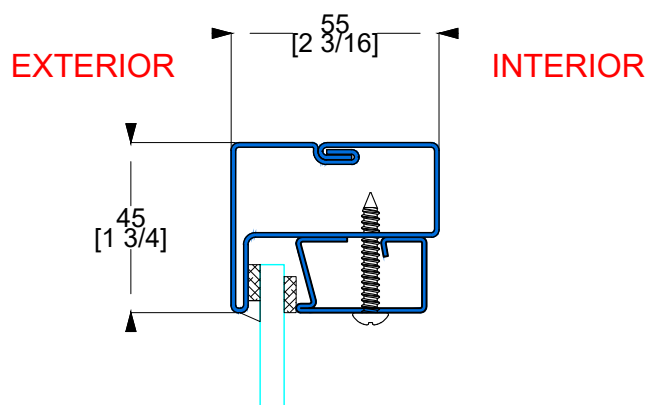**F**


**TYPICAL FIXED
HEAD & SILL W/ 1/4" GLASS**

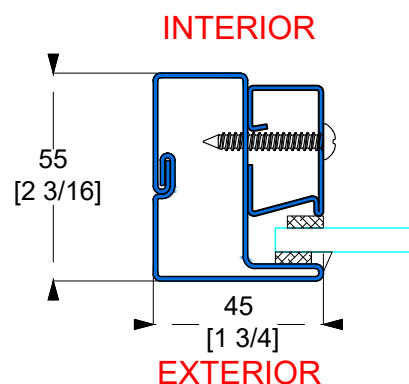**G**

**TYPICAL FIXED
JAMB W/ 1/4" GLASS**

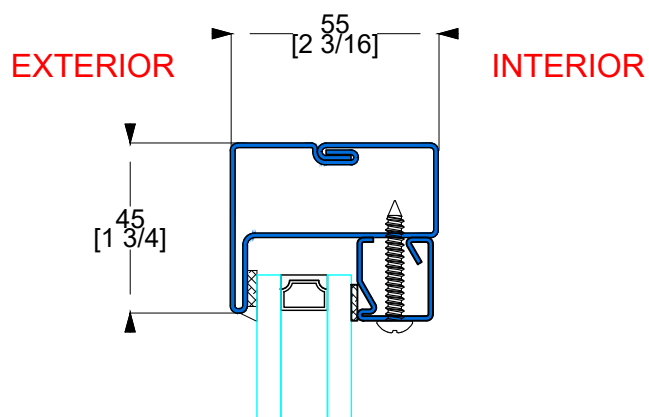**H&J**

**TYPICAL FIXED
HEAD & SILL W/ 1" GLASS**

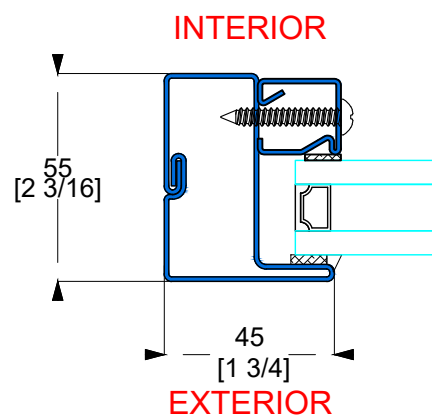**K&L**

**TYPICAL FIXED
JAMB W/ 1" GLASS**


FIRE RATING: 45 MINUTES

FIRE-RATED SELF-CLOSING PROJECTED WINDOW




UL CLASSIFIED & LABELED


PROJECTED-IN TYPICAL DETAILS

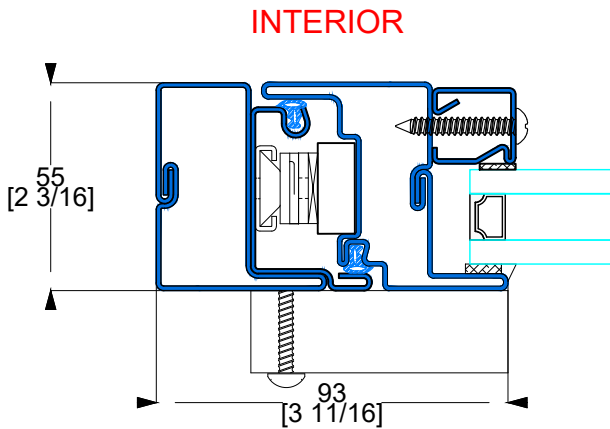


M&N TYPICAL STACKING JAMB

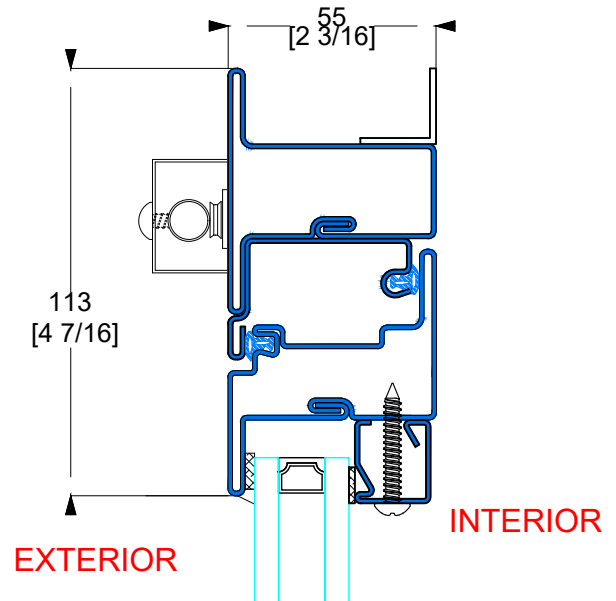

P TYPICAL STACKING HEAD

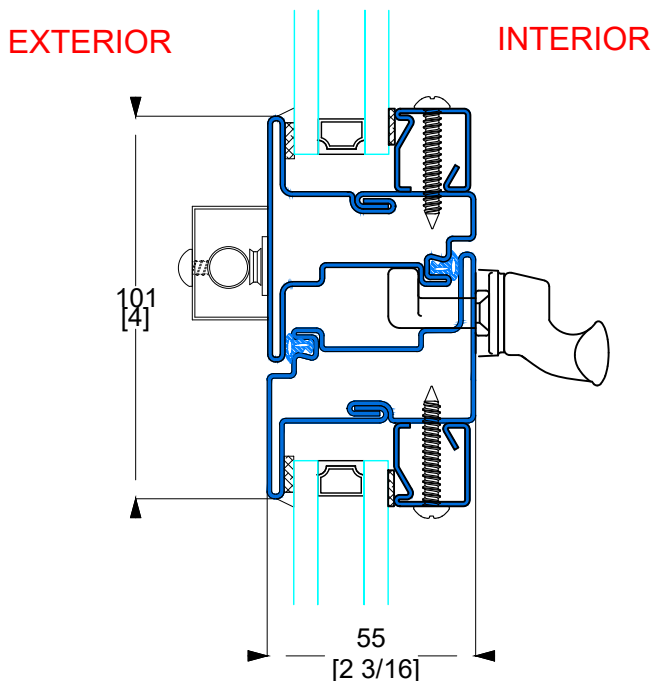

R TYPICAL STACKING MULLION

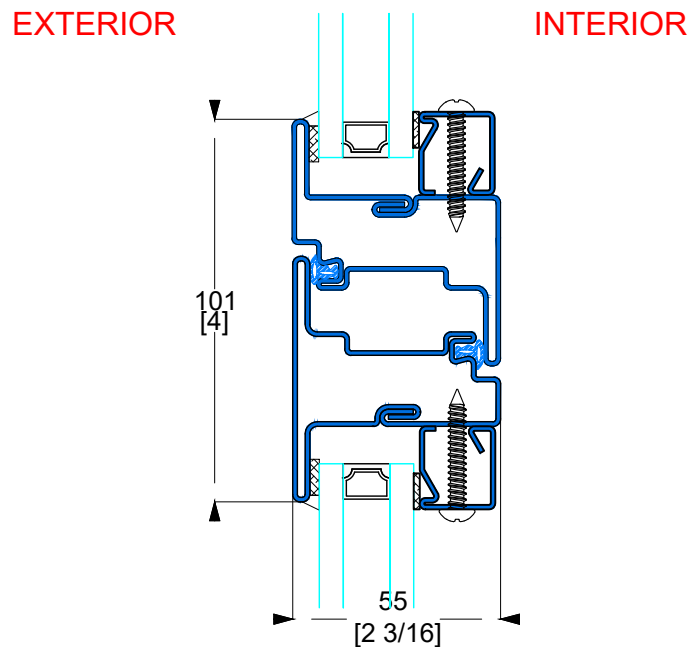

S TYPICAL LOCK STACKING MULLION

FIRE RATING: 45 MINUTES


FIRE-RATED SELF-CLOSING PROJECTED WINDOW



UL CLASSIFIED & LABELED

PROJECTED-IN TYPICAL DETAILS


INTERIOR

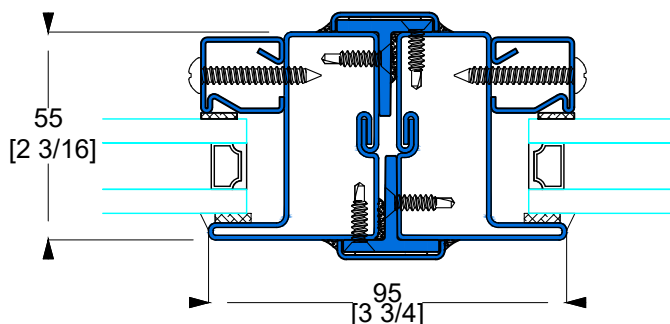

EXTERIOR

T TYPICAL FIXED JOINING MULLION


INTERIOR

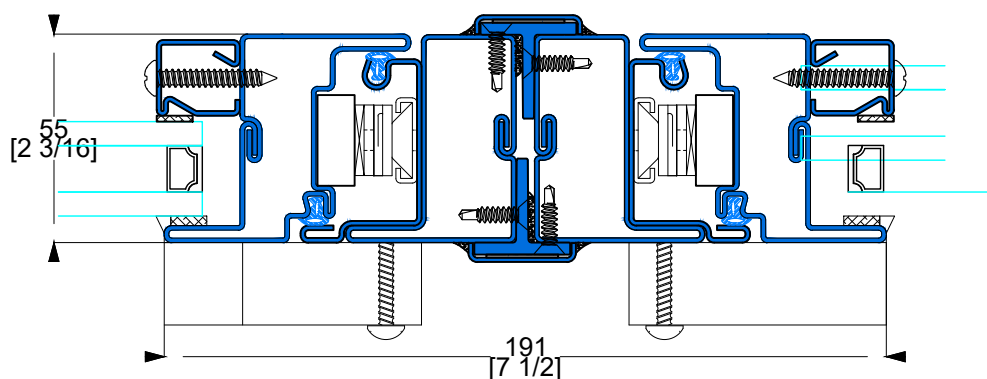

EXTERIOR

V TYPICAL OPERABLE JOINING MULLION

INTERIOR

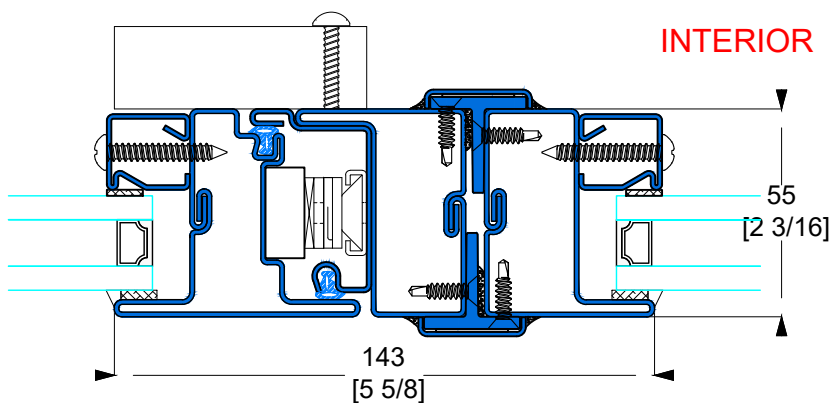

EXTERIOR

X TYPICAL JOINING MULLION


FIRE RATING: 45 MINUTES

FIRE-RATED SELF-CLOSING PROJECTED WINDOW




UL CLASSIFIED & LABELED


PROJECTED-IN TYPICAL DETAILS

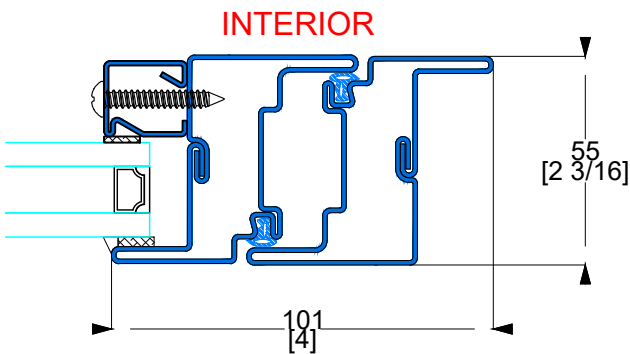


1 **TYPICAL JAMB**
INTERIOR FLANGE

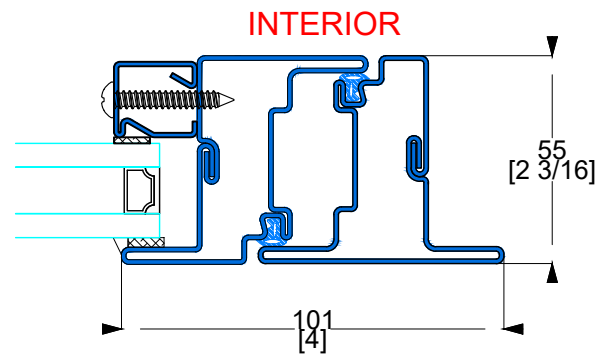

2 **TYPICAL JAMB**
EXTERIOR FLANGE

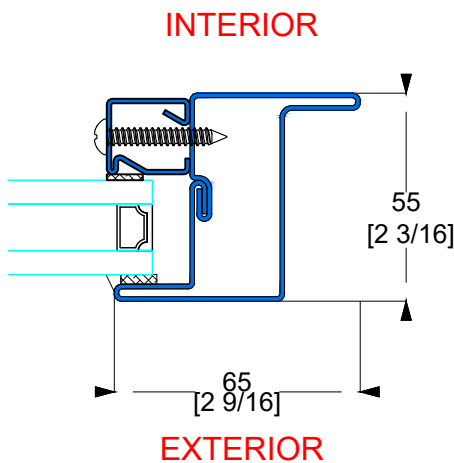

3 **TYPICAL FIXED**
INTERIOR FLANGE

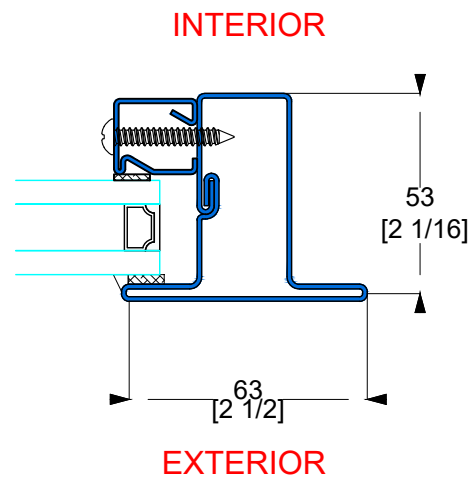

4 **TYPICAL FIXED**
EXTERIOR FLANGE