




### OUTSWING CASEMENT

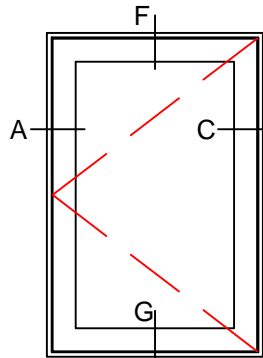


5500\_11\_OC

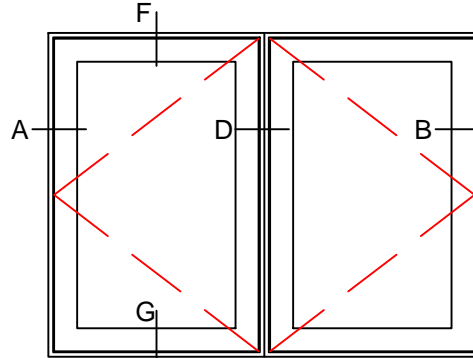


5500\_21\_DC\_OC

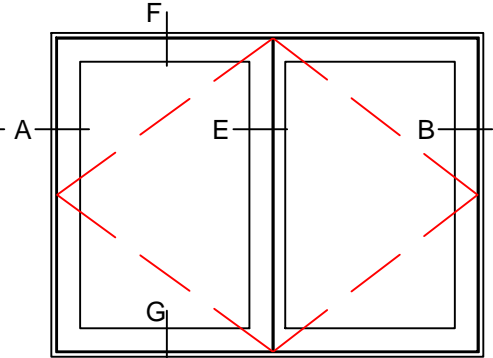


5500\_21\_FR\_OC

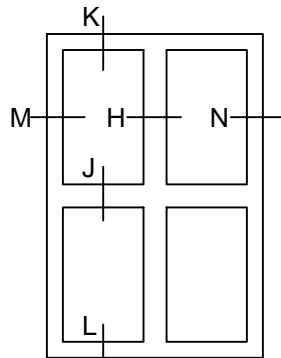


5500\_22\_FX

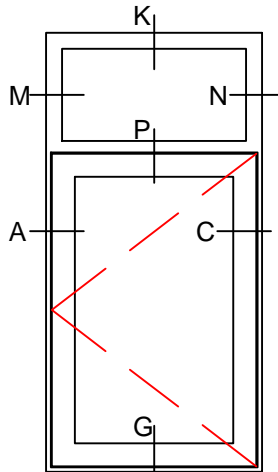


5500\_12\_OC\_FX

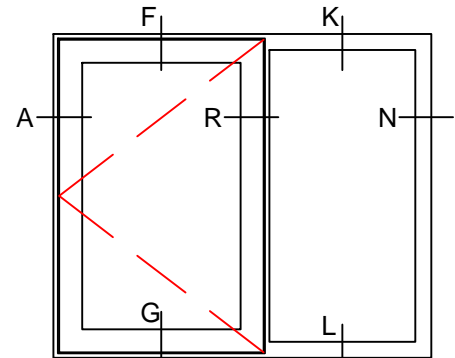

5500\_21\_OC\_FX

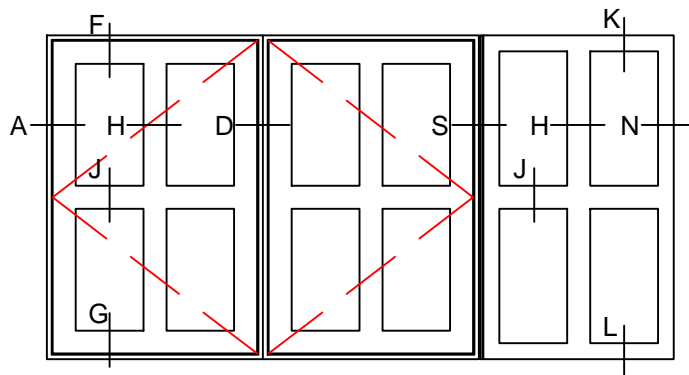

5500\_62\_DC\_OC\_FX

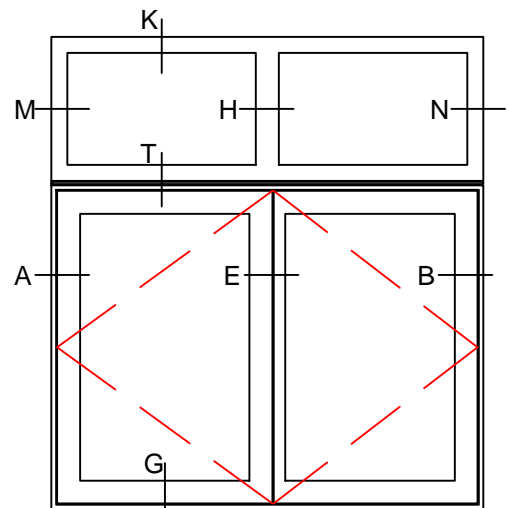


5500\_22\_FR\_OC\_FX

## OUTSWING CASEMENT


1. Snap in steel glazing bead
2. Snap fastener
3. Extruded EPDM wedge gasket (by OWM)
4. Glass and glazing (by others)
5. Silicone cap bead (by others)
6. Glazing tape (by others)
7. Weather stripping
8. Steel flex hinge
9. White bronze multipoint fastener with keeper

\*Note: White bronze hardware is OWM's standard (other finishes and options available)


10. White bronze T-pull (located 4" above fastener)

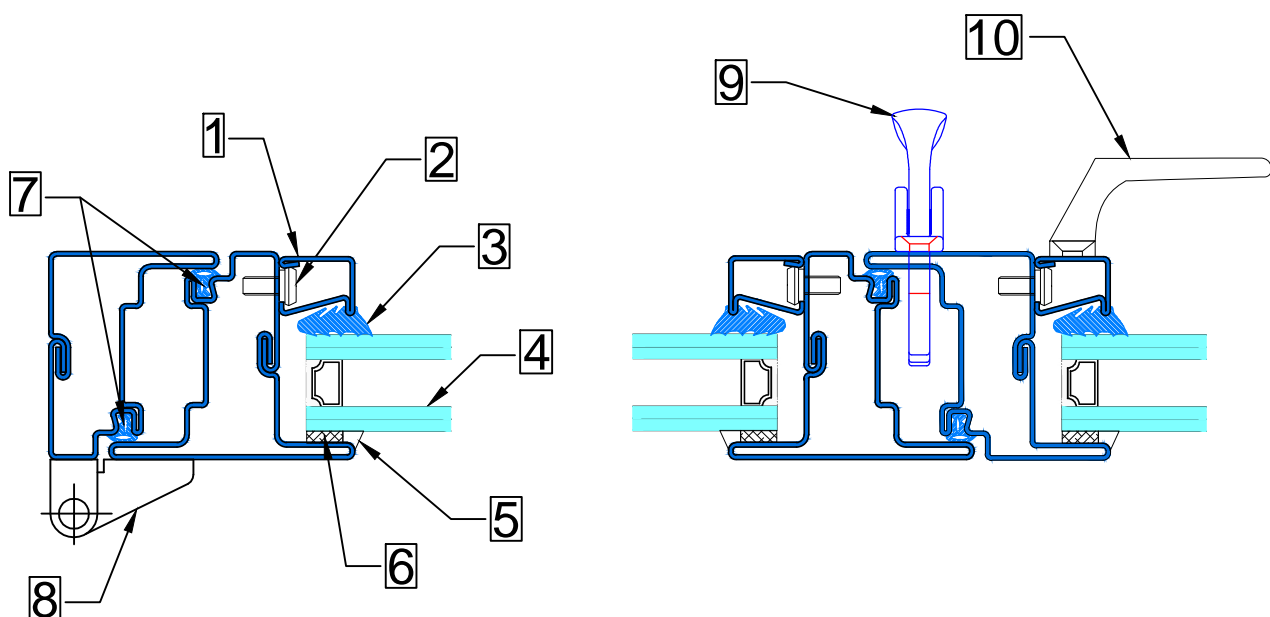


OUTSWING CASEMENT

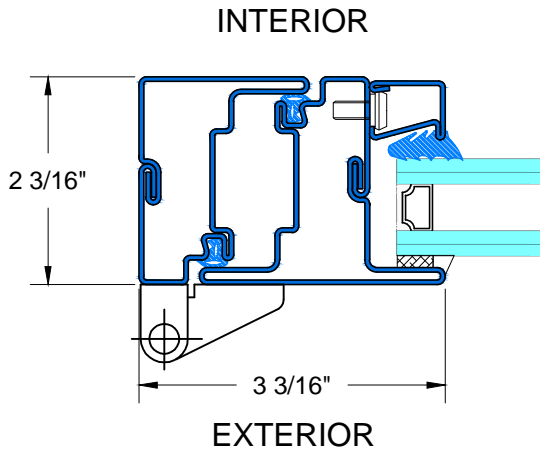


**A&B** TYPICAL HINGED JAMB

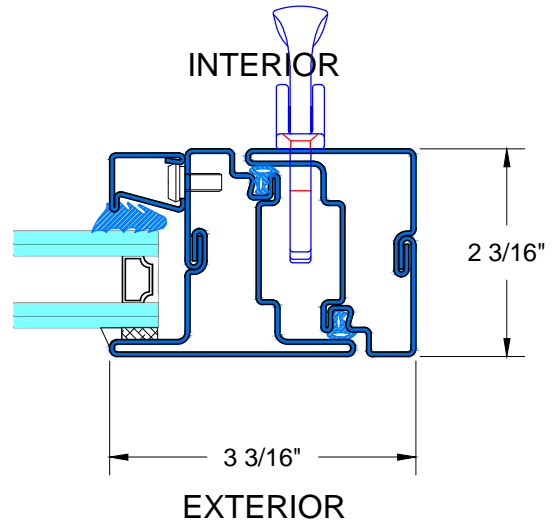

**C** TYPICAL LOCKING JAMB

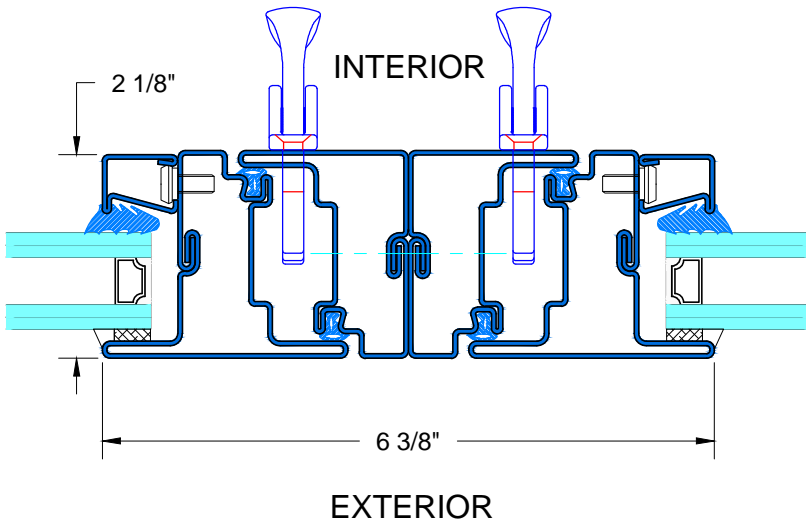


**D** TYPICAL MEETING RAIL

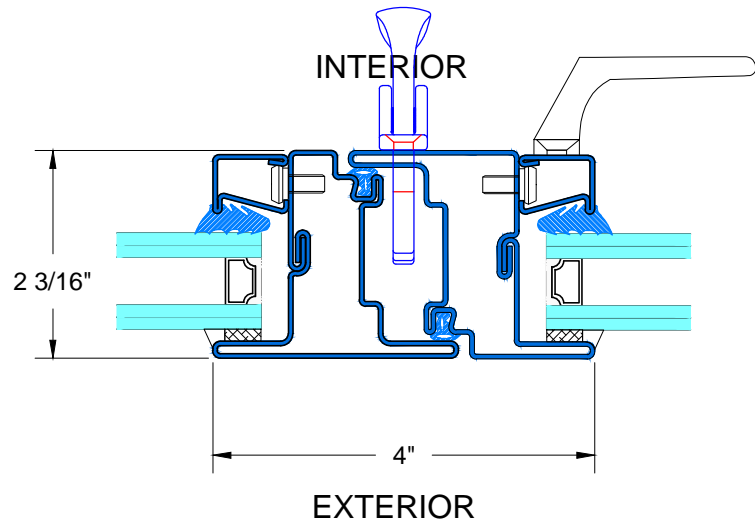


**E** TYPICAL FRENCH MEETING RAIL


## OUTSWING CASEMENT

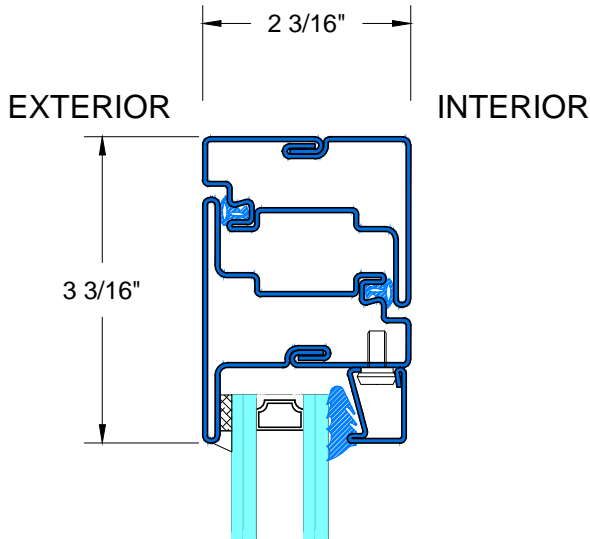


**F** TYPICAL HEAD

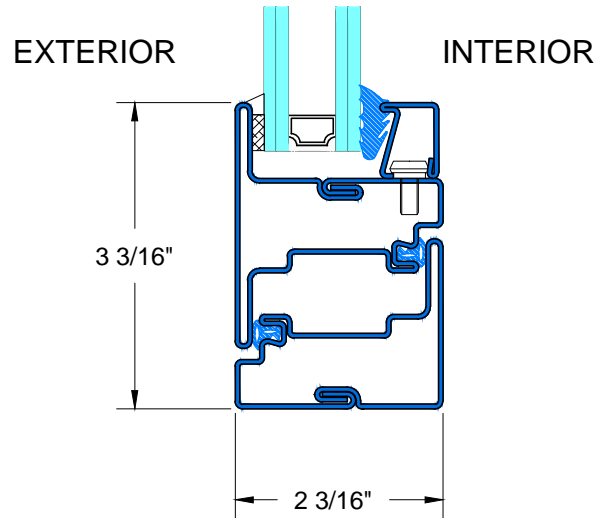

**G** TYPICAL SILL

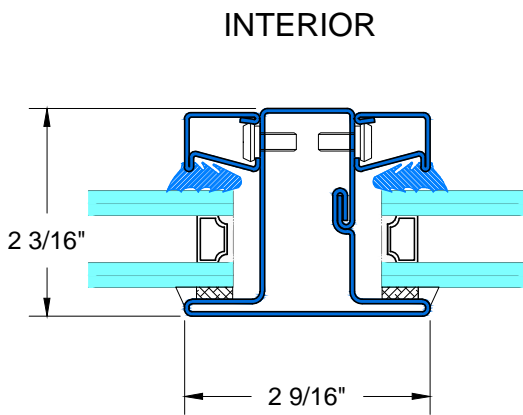


**H** TYPICAL VERTICAL MUNTIN

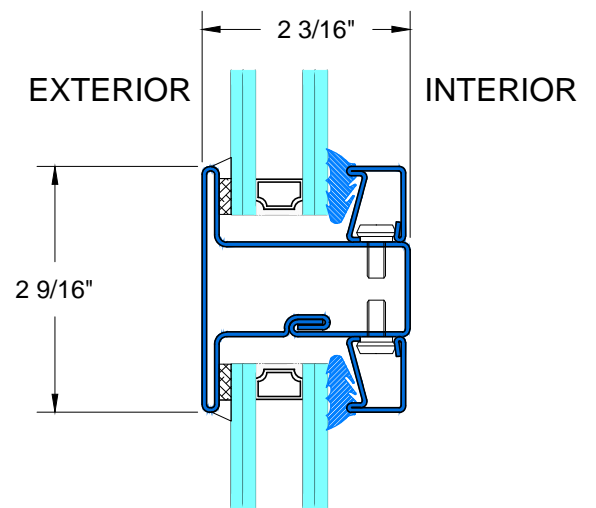


**J** TYPICAL HORIZONTAL MUNTIN


# OUTSWING CASEMENT

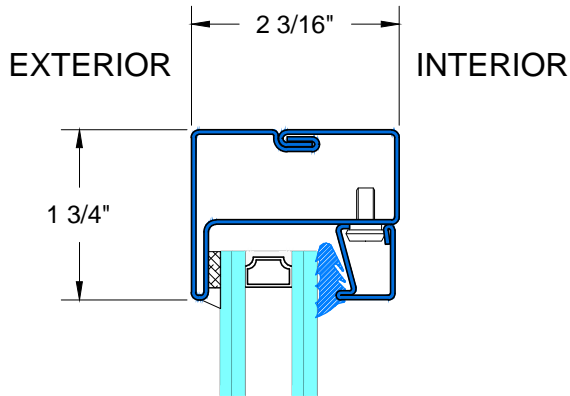


**K&L** TYPICAL FIXED HEAD & SILL

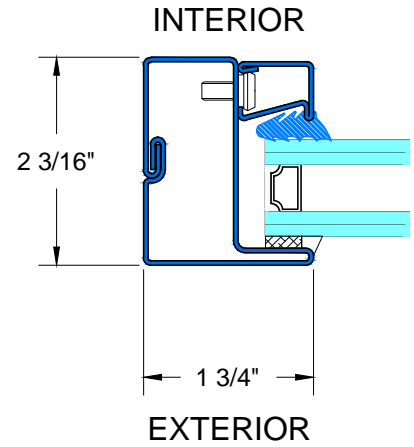

**M&N** TYPICAL FIXED JAMB


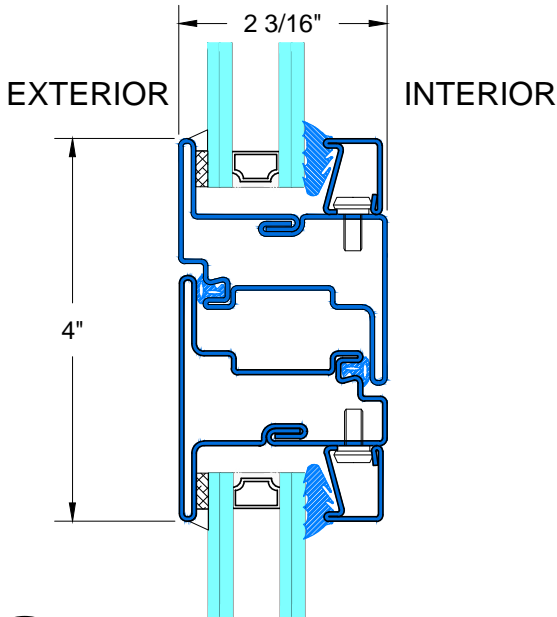


**P** TYPICAL HEAD W/ TRANSOM

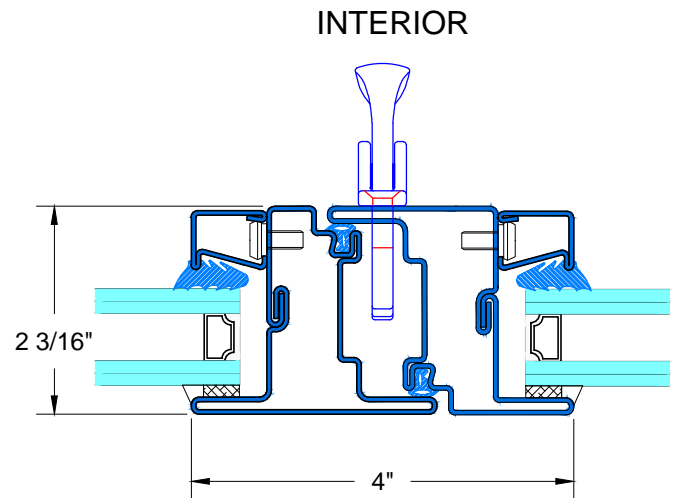

**R** TYPICAL JAMB W/ SIDELITE



**OUTSWING CASEMENT**

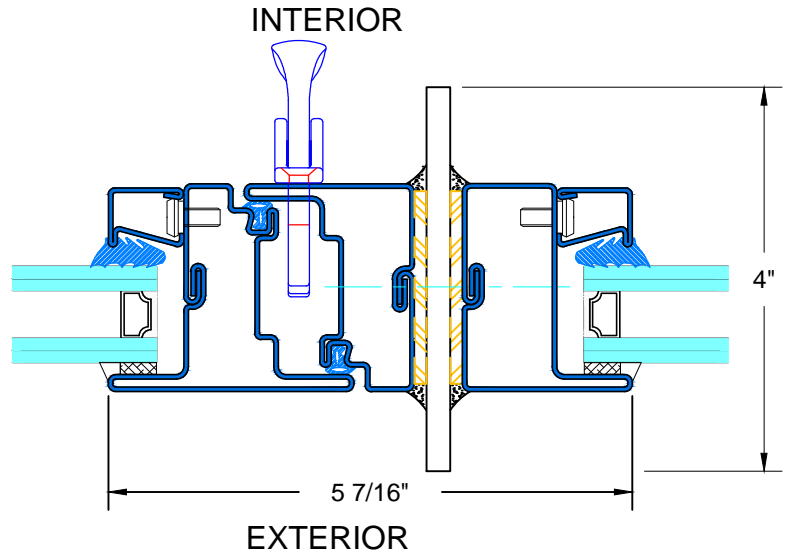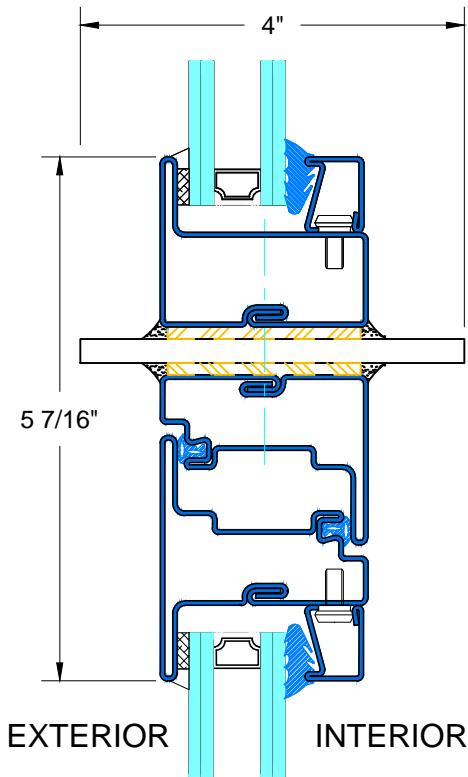

**S** TYPICAL STACKING MULLION

**T** TYPICAL JOINING MULLION

**OPTIONAL FLANGE FRAME**

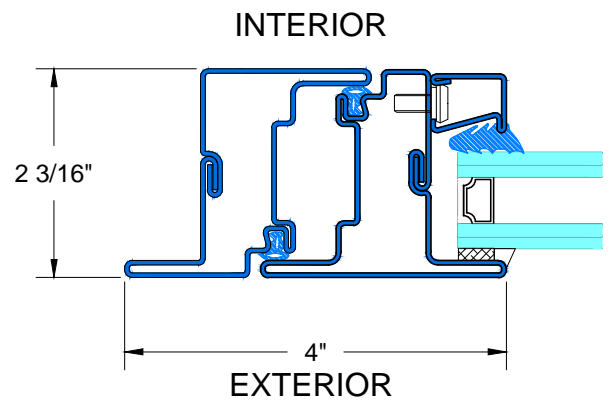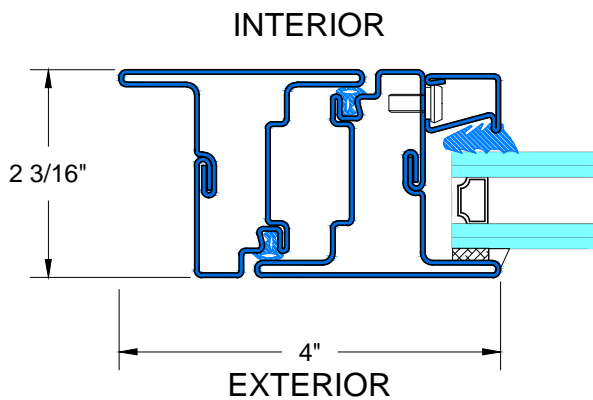

**1** TYPICAL JAMB INTERIOR FLANGE

**2** TYPICAL JAMB EXTERIOR FLANGE